

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**





A36168 – 072035.0138  
PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Cox et al. Customer No. : 21003  
Serial No. : 10/773,663 Examiner : Not Yet Assigned  
Filed : February 6, 2004 Group Art Unit: 1732  
For : METHOD OF FORMING A DECORATIVE STRUCTURE AND A  
DECORATIVE STRUCTURE MADE BY THE METHOD

SUBMISSION OF PRIORITY DOCUMENT

I hereby certify that this paper is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

June 4, 2004  
Date of Deposit

Rochelle K. Seide  
Attorney Name  
Rochelle K. Seide  
Signature

32,300  
PTO Registration No.  
June 4, 2004  
Date of Signature

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450


Dear Sir:

A claim for priority under the provisions of 35 U.S.C. §119 for the above-identified U.S. patent application based upon Great Britain Patent Application No. 0302755.4, filed February 7, 2003, was made in the Patent Application Transmittal dated February 6, 2004, and is hereby again made. A certified copy of the Great Britain priority document is enclosed herewith.



There should be no fee required for this submission. However, if any fee is required, or if any overpayment has been made, the Commissioner is hereby authorized to charge any fees, or credit or any overpayments made, to Deposit Account 02-4377. A duplicate copy of this paper is enclosed.

Respectfully submitted,

A handwritten signature in cursive script, reading "Rochelle K. Seide". The signature is written in dark ink and is positioned above a horizontal line.

Rochelle K. Seide

Patent Office Reg. No. 32,300

Baker Botts LLP  
30 Rockefeller Plaza  
New York, NY 10112

Attorney for Applicants  
(212) 408-2626

Enclosures





INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

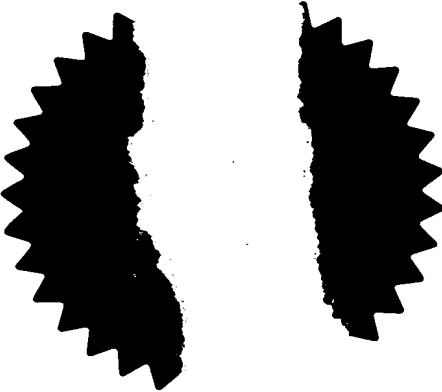

Signed *AmBrewster*

Dated 3 February 2004





Pat Form 1/77

Patents Act 1977  
(Rule 16)

THE PATENT OFFICE

- 7 FEB 2003

RECEIVED BY FAX

07FEB03 E783070-1 C04150  
P01/7700 0.00-0302755.4**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference 563

2. Patent application number  
(The Patent Office will fill in this part)

0302755.4

07 FEB 2003

3. Full name, address and postcode of the or of  
each applicant (underline all surnames)

79113 57001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the  
country/state of its incorporationCREATIVE RESINS INTERNATIONAL LTD.  
UNIT 2/3, CHURCH ROAD BUSINESS CENTRE  
CHURCH ROAD,  
MURSTON  
SITTINGBOURNE,  
KENT, ME10 3RS  
GB

4. Title of the invention

DECORATIVE GLASS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)COHEN, ALAN NICOL  
2 GROVE PLACE  
TATSFIELD  
Nr. WESTERHAM  
KENT  
TN16 2BB

Patents ADP number (if you know it)

6963557001

6. If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and (if you know it) the or  
each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)7. If this application is divided or otherwise  
derived from an earlier UK application,  
give the number and the filing date of  
the earlier application

Number of earlier application

Date of filing  
(day / month / year)8. Is a statement of inventorship and of right  
to grant of a patent required in support of  
this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d)

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

## Continuation sheets of this form

Description	4
Claim(s)	2
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

## Priority documents

## Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

08/02/03

12. Name and daytime telephone number of person to contact in the United Kingdom

A. N. Cohen

01959 577172

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

- 1 -

## Decorative Glass

The present invention relates to a decorative glass structures such as windows, panels, mirrors etc. which have the appearance of textured glass or deeply contoured glass and to methods of forming such structures.

In order to obtain brilliant cut or bevelled glass a process is used in which CNC machines use diamond tipped heads cooled with water to cut grooves and curved shapes into a plastic or glass surface. Light diffracts through the transparent outline in a similar way to brilliant cut or bevelled glass. This process requires expensive equipment and is difficult and expensive to carry out for complex patterns and for a large number of panels.

US Patent 5783264 describes a decorative window which consists of a thick transparent plastic resin layer laminated to a sheet of glass. The resin layer can be decorative and can have a finely detailed textured surface. The Patent also describes a method of forming such a structure by forming a silicone mould, made from a Rubber Silicon from a master and placing this mould on a sheet of glass which has been coated with an adherent layer, filling this mould with resin and allowing the resin to set and removing the mould. The resins disclosed are polyester resins containing an organosilane ester.

The adherent layer disclosed is formed of an organosilane and the resin disclosed is a polyester resin which is mixed with a small amount of a peroxide catalyst and an organosilane ester so that after the mould has been filled with the resin, the resin hardens to form a structure; the mould is then removed.

However the presence of the organosilane ester and in particular the use of a Rubber Silicon mould adversely affects the curing of the surface of the polyester resin leaving it sticky to the touch. This means that extreme care needs to be taken once the silicon mould has been removed as the sticky surface is easily contaminated with dust, debris and finger marks which cannot be removed without showing evidence.

- 2 -

In addition the use of Silicon Rubber moulds requires direct heating of the resin to bring about an effective cure. The resin can react with the mould to cause styrenisation of the mould so that the mould has to be thoroughly cleaned, washed and dried after a number of castings. Rubber Silicon moulds eventually lose their flexibility and hairline cracks appear which render the mould useless.

We have now devised an improved system which overcomes these problems.

According to the invention there is provided a method of forming a decorative glass structure which comprises positioning a mould against a flat sheet to form a mould cavity between the sheet and the mould surface, introducing a curable resin into the mould cavity to form a resin sheet with a contoured surface, curing the resin, and releasing the mould to form a sheet having a contoured resin sheet adhered to one surface in which method the mould has a substantially inelastic surface.

The mould surface may be comprised of any substantially inelastic material and preferably the mould is made of a substantially inelastic material.

The sheet is preferably a glass sheet, but it can be a rigid resin or plastic sheet or something similar. Preferably the sheet is transparent or translucent but it can be coloured, silvered etc.

Preferably there is a release agent such as gel, oil or wax, or chemical release agent on the surface of the mould so that the mould is readily releasable from the cured resin.

Preferably around the mould is a groove into which a sealing strip e.g. made of silicone rubber, is located and the glass sheet is positioned on the strip so that the height of the strip above the mould controls the thickness of the resin layer on the glass surface.

- 3 -

The substantially inelastic material forming the mould surface may be reinforced by a material to form a rigid structure. If required the surface of the mould can be patterned so that surface effects can be formed on the casting.

- 5 The casting resin is preferably a resin which, when it cures, forms a hard transparent glass like surface such as a polyester e.g. an acrylate or polyacrylate which is introduced into the mould cavity with a hardener so that it cures to form a hard resin. As the mould is not made of silicone, such as a Rubber Silicon, there is no impaired surface cure on the casting resin; in the absence of the silicon mould, curing of the
- 10 resin takes place completely at ambient temperature and without the necessity of direct heating. The surface of the cast resin structure is fully cured and hard and dry to touch. This allows it to be used in a single glazed environment such as mirrors, kitchen doors or shower screens. It can be encapsulated within an insulated glass unit or applied to the surface of such a unit.

15

The glass sheet is preferably coated with a layer to improve bonding of the resin to the glass a suitable layer is a silane or mixture of silanes in solution e.g. in water and an alcohol such as isopropyl alcohol.

- 20 To form the structure of the invention the mould is preferably positioned so that it is at an angle to the horizontal and the glass sheet clamped to the mould to form a mould cavity, there is an inlet at the lowest end of the mould where the resin can be introduced and an air outlet at the top, the casting resin and hardener is introduced into the mould at the lowest point and it fills up the mould and the displaced air goes out
- 25 through the air outlet; this reduces the possibility of air bubbles being formed.

- The glass sheet can be transparent or it can be coloured or decorated as required, if it is silvered a mirror can be formed. The mould can be divided into separate sections and different resins can be introduced in different sections e.g. different sections can
- 30 have different colours etc.

- 4 -

The cast resin can be formed so that it has grooves or the like formed in it which, when the resin is cured can be painted to give the appearance of leaded lights.

The invention is illustrated in the accompanying drawings in which: -

- 5 Fig. 1 shows a schematic view of a mould and  
Fig. 2 shows a side view of the mould partially filled with resin  
Fig. 3 shows a side view of the mould full of resin

10 A substantially inelastic mould (1) is coated with a release agent and has silicone rubber strips (6) located in grooves in the mould to define an area of the mould. Transparent glass sheet (2) is placed on the silicone rubber strips and clamped in place to define a mould cavity (7) between the mould (1) and the glass sheet (2). An acrylate resin and hardener (8) is introduced into the mould at inlet (4) to fill the mould cavity (7) and the displaced air exits at outlet (5).

15

After about an hour at ambient temperature the resin cures to form a hard transparent resin which is stuck to the glass sheet (2) and the mould is unclamped and separated from the glass sheet. The glass sheet with a contoured surface can then be used e.g. as a window door panel etc.

20

- 5 -

## Claims

1. A method of forming a decorative structure which comprises positioning a mould against a flat sheet to form a mould cavity between the sheet and the mould surface,  
5 introducing a curable resin into the mould cavity to form a resin sheet with a contoured surface, curing the resin, and releasing the mould to form a sheet having a contoured resin sheet adhered to one surface in which method mould surface is formed of a substantially inelastic material.
- 10 2. A method as claimed in claim 1 in which the mould is formed of substantially inelastic materials.
3. A method as claimed in claim 1 or 2 in which the sheet is a transparent or translucent glass sheet.  
15
4. A method as claimed in any one of claims 1 to 3 in which there is a release agent such as gel, oil, wax or chemical release agent on the surface of the mould.
5. A method as claimed in any one of the preceding claims in which there is a groove  
20 in the mould in which there is an adjustable sealing strip and the glass sheet is positioned on the strip so that the height of the strip above the mould controls the thickness of the resin layer on the glass surface.
6. A method as claimed in any one of the preceding claims in which the mould  
25 surface is reinforced with a solid material to form a rigid structure.
7. A method as claimed in claim 3 in which the surface of the mould is patterned so that surface effects are formed on the casting.
- 30 8. A method as claimed in any one of the preceding claims in which the casting resin is a polyester resin which, when it cures, forms a hard transparent glass like surface

- 6 -

9. A method as claimed in claim 8 in which the resin, which is introduced into the mould cavity with a hardener so that it cures to form a hard resin.

- 5      10. A method as claimed in any one of the preceding claims in which the mould is positioned so that it is at an angle to the horizontal and the glass sheet clamped to the mould to form a mould cavity, there being an inlet at the lowest end of the mould where the resin can be introduced and an air outlet at the top, the casting resin is introduced into the mould at the lowest point and fills up the mould and the displaced  
10      air goes out through the air outlet.

11. A decorative structure made by the method of any one of the preceding claims.



563 First Revision 02-02-2003  
7-Feb-03 - 09:06

- 7 -

### Abstract

A glass sheet having a contoured or bevelled surface is formed by casting a polyacrylate resin using a substantially inelastic mould.

5



1/1

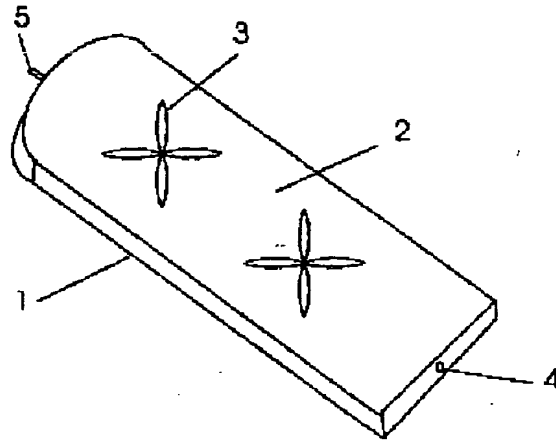


Fig. 1

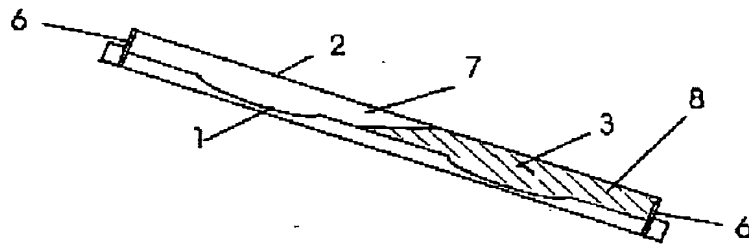


Fig. 2

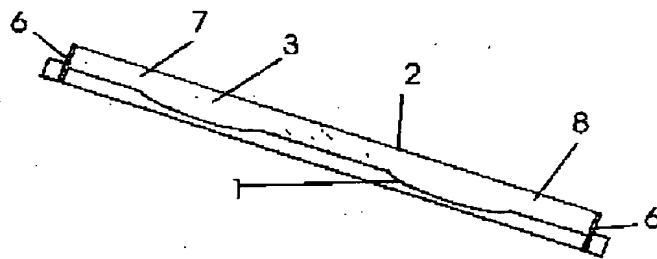


Fig. 3

